

# RD5000<sup>™</sup>WL

EASY TO USE, SINGLE FREQUENCY PIPE AND CABLE LOCATOR



## GUIDANCE MODE

Arrows guide the user towards the target. The shorter the tail, the closer you are to the target.



## COMPASS

Follow the orientation of the target pipe or cable with the on-screen indicator.

## EASE OF USE

Single button operation allows you to concentrate on the job not the tools you are using.

## EXCELLENT INDUCTION PERFORMANCE

The RD5000WL has been optimised to induce easy-to-follow signals on buried pipes and cables.

## Introducing the RD5000™WL

– an easy to use, single frequency pipe and cable locator.

Tracing buried pipes and cables, whether to locate faults or to avoid utilities during excavation work, can present major difficulties. This can be made even worse in cases where a pipe has rubber seals, insulators or even gaps between sections. These problems, if not overcome, can result in costly repairs, delays and in some instances personal injury.

The RD5000WL kit has been designed to address these issues. Ease of use is at the heart of the product, coupled with the accuracy, repeatability and reliability you have come to expect from Radiodetection's locator products.

The RD5000WL's single high active frequency is very well suited to disjointed pipes and cables, and plastic pipes with tracer wire. The signal can be applied either by direct connection or by induction, which is also an excellent way of lighting up all nearby conductors for blind locates.

### Standard features of the RD5000WL include:

#### EASY TO USE:

- **Single button operation** – Both locator and transmitter operate from a single button, making them amongst the easiest to use products available.
- **Single frequency** – The RD5000WL operates at 83kHz, a frequency that travels well along pipes such as gas and water pipes, that may have gaps between sections.

#### TWO MODES:

- **Guidance Mode** – The target position indicator, proportional arrows and audio signals guide the user towards the target pipe or cable. Compass indicates the orientation of the target and the Signal Strength given out by the target is also displayed.
- **Signal Strength Mode** – The numerical scale, from 0 to 999, indicates the strength of the signal from the target. The target position indicator and audio are turned off, leaving an easy to use, uncluttered screen.

#### COMPASS:

Provides the user with a visual indication of the target pipe or cable's orientation, simplifying the task of following the correct target line.

### TRUDEPTH™:

Ensures that depth is indicated when the locator is oriented correctly above the target, to assist in positioning the locator properly for the most accurate reading.

### CURRENT:

The current flowing in the line is displayed, when the locator is correctly positioned above the target, helping to ensure that the operator can follow the target line.

### CENTROS™ MANAGER:

Update the software and verify the calibration of your RD5000WL locator using eCAL™.

### AUDIO TONES:

A continuous tone to the left of the target and an intermittent tone to the right, when in Guidance Mode mode, helps guide the user towards the target.

### DEPTH:

Depth is displayed when the locator is correctly positioned above the target. The RD5000WL is available in Imperial or Metric versions.

### BACKLIT DISPLAY AS STANDARD:

Auto switching backlight minimizes the effect of poor lighting conditions.

### RECHARGEABLE BATTERIES:

The rechargeable batteries for the both RD5000WL locator and transmitter offer a full working day's operation from one complete charge.

### HIGH POWER OUTPUT:

Automatic impedance matching allows the RD5000WLT transmitter to deliver a powerful 83kHz signal via direct-connection across a wide range of line impedance. Induction strength equals that of the powerful Radiodetection Tx-10.



### DYNAMIC OVERLOAD PROTECTION

The latest signal processing techniques give the RD5000WL the ability to reject unwanted signals that can swamp other locators' detection circuitry.




### CLEARTRACK™

The powerful digital signal processing engine provides automatic rejection of adjacent bleedover signals, leading to more accurate location in increasingly congested underground utility networks.

## GUIDANCE MODE

The length of the arrows is proportional to the distance from the target as the RD5000WL guides the user towards the pipe or cable of interest. The target position indicator also indicates the direction to the target.

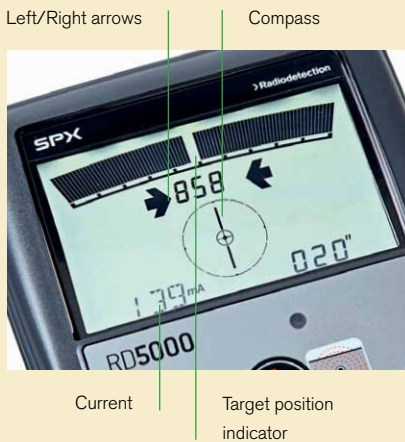

## CENTROS ENABLED:

The RD5000WL is Centros™ enabled. Centros is a measurement engine based on more than 30 years of continuous development, combining new and innovative algorithms with established software on a high-performance processor core. Centros improves location accuracy and repeatability and delivers timely responsiveness in the field.

## ECAL™:

A novel Radiodetection technique that allows the operator to validate the original factory calibration of the RD5000WL. This gives the operator confidence that the locator continues to meet its factory calibration. eCAL™ can issue and print a validation certificate without needing to return the RD5000WL to a service center.

## EXTENDED WARRANTY:

Extend the normal 1 year warranty to 3 years, by registering on-line within 3 months of purchase, for no additional cost. Registered products also receive free product software and feature upgrades through Centros Manager as they are released.

Signal Strength



## SIGNAL STRENGTH MODE

Numerical indication, from 0 to 999, of the strength of the field given out by the target, helping the user to pinpoint its position. Compass, depth and current are also shown in this mode.







High contrast LCD with auto-backlight

Single button operation:

Long press to turn on and off  
Short press to change modes

Splash-proof keypad

Rechargeable battery pack as standard

Tray for alkaline batteries  
(D-cells) also available

Ergonomic robust  
ABS case



Accessory  
connections

High visibility  
reflective  
safety arrows

Headphone connection

Internal Li-ion batteries  
4xD-Cell (LR-20)  
battery compartment

Induction mode alignment arrow:

Line arrow up with the target pipe or cable  
to achieve the best coupling

On/Off switch

Multi use socket:

Direct connection output  
Accessory output  
Li-ion battery charging input



Battery level  
warning LEDs

LEDs flash when  
batteries in use are low



### Direct connection

The most effective method for connecting to a valve, meter, junction box or other access point, as long as access is possible.



### Signal clamping (Optional)

Applies a transmitter signal safely to a pipe or live cable up to 100mm diameter without interrupting the supply.



### Induction

A convenient and quick way of applying the transmitter signal to pipe or cable, where direct connection or signal clamping is not possible.

## DEPTH

Displays depth to assist with following the correct target and with safe excavations.



## SINGLE FREQUENCY

83kHz, optimized for water and gas pipes with poor electrical connections between sections.

## CURRENT IN mA

Current is displayed, to aid the user to track the correct target pipe or cable.

## TRUDEPTH™

Ensures the locator is positioned correctly above the target for the most accurate depth and current readings.

## Technical specifications

RD5000WL LOCATOR	
Depth accuracy <sup>□</sup>	±5% ±0.01m (0.5") from 0.1m (4") to 3m (10ft)
Frequency of sensitivity	83kHz (83,077Hz ±5Hz)
Maximum depth	6m* (20ft)
Batteries	Rechargeable battery pack (standard) or 2xD-Cells (LR20) (optional, battery tray required)
Battery life (continuous usage)	Rechargeable: >15 hours, 0°C to +50°C (32°F to 122°F)
Warranty	12 months 36 months <sup>†</sup>
Dynamic Overload Protection	30dB (automatic)
Compliance	FCC, RSS 310 RoHS, WEEE, CE
Weight	1.87kg (4lbs) (including rechargeable batteries)
Environmental protection	IP54
Operating temperature range	-20°C to +50°C (-4°F to 122°F)
Units displayed	Inches (RD5000WLI) Meters (RD5000WLM)

<sup>□</sup>In good conditions.

\*RD5000 will locate to a depth of over 15m (50ft) but accuracy may be reduced.

<sup>†</sup>Extended warranty available upon registration, within 3 months of purchase, at: [www.radiodetection.com/extendedwarranty](http://www.radiodetection.com/extendedwarranty)

RD5000WLT TRANSMITTER	
Frequency	83kHz (83,077Hz ±5Hz)
Nominal power output	1W in Direct Connect mode
Batteries	Internal rechargeable battery pack 4xD-Cells (LR-20)
Battery life (continuous usage)	Rechargeable: >20 hours, 0°C to +50°C (32°F to 122°F)
Warranty	12 months 36 months <sup>†</sup>
Compliance	FCC, Canada 310 RoHS, WEEE, CE
Weight	1.6kg (3.5lbs) (including rechargeable batteries)
Environmental protection	IP54
Operating temperature range	-20°C to +50°C (-4°F to 122°F)

<sup>†</sup>Extended warranty available upon registration, within 3 months of purchase, at: [www.radiodetection.com/extendedwarranty](http://www.radiodetection.com/extendedwarranty)



# RD5000™WL

**EASY TO USE, SINGLE FREQUENCY  
PIPE AND CABLE LOCATOR**



## Global locations

### USA

#### **SPX Global Headquarters**

13515 Ballantyne Corporate Place  
Charlotte, NC 28277, USA  
Tel: +1 704 752 4400  
[www.spx.com](http://www.spx.com)

#### **Radiodetection**

28 Tower Road, Raymond, Maine 04071, USA  
Tel: +1 (207) 655 8525  
Toll Free: +1 (877) 247 3797  
Fax: +1 (207) 655 8535  
Email: [rd.sales.us@spx.com](mailto:rd.sales.us@spx.com)  
[www.radiodetection.com](http://www.radiodetection.com)

#### **Pearpoint**

39-740 Garand Lane, Unit B  
Palm Desert, CA 92211, USA  
Tel: +1 800 688 8094  
Tel: +1 760 343 7350  
Fax: +1 760 343 7351  
[pearpoint.sales.us@spx.com](mailto:pearpoint.sales.us@spx.com)  
[www.radiodetection.com](http://www.radiodetection.com)

#### **Radiodetection (Canada)**

344 Edgeley Boulevard, Unit 34  
Concord, Ontario L4K 4B7, Canada  
Tel: +1 (905) 660 9995  
Toll Free: +1 (800) 665 7953  
Fax: +1 (905) 660 9579  
[rd.sales.ca@spx.com](mailto:rd.sales.ca@spx.com)  
[www.radiodetection.com](http://www.radiodetection.com)

### EUROPE

#### **Radiodetection Ltd. (UK)**

Western Drive, Bristol BS14 0AF, UK  
Tel: +44 (0) 117 976 7776  
Fax: +44 (0) 117 976 7775  
[rd.sales.uk@spx.com](mailto:rd.sales.uk@spx.com)  
[www.radiodetection.com](http://www.radiodetection.com)

#### **Radiodetection (France)**

13 Grande Rue, 76220, Neuf Marché, France  
Tel: +33 (0) 2 32 89 93 60  
Fax: +33 (0) 2 35 90 95 58  
[rd.sales.fr@spx.com](mailto:rd.sales.fr@spx.com)  
<http://fr.radiodetection.com>

#### **Radiodetection (Benelux)**

Industriestraat 11  
7041 GD 's-Heerenberg, Netherlands  
Tel: +31 (0) 314 66 47 00  
Fax: +31 (0) 314 66 41 30  
[rd.sales.nl@spx.com](mailto:rd.sales.nl@spx.com)  
<http://nl.radiodetection.com>

#### **Radiodetection (Germany)**

Groendahlscher Weg 118  
46446 Emmerich am Rhein, Germany  
Tel: +49 (0) 28 51 92 37 20  
Fax: +49 (0) 28 51 92 37 520  
[rd.sales.de@spx.com](mailto:rd.sales.de@spx.com)  
<http://de.radiodetection.com>

### ASIA-PACIFIC

#### **Radiodetection (Asia-Pacific)**

Room 708, CC Wu Building  
302-308 Hennessy Road, Wan Chai  
Hong Kong SAR, China  
Tel: +852 2110 8160  
Fax: +852 2110 9681  
[rd.sales.cn@spx.com](mailto:rd.sales.cn@spx.com)  
[www.radiodetection.com](http://www.radiodetection.com)

#### **Radiodetection (China)**

Hongfu Mansion, Room 61622  
Zheng Ge Zhuang, Bei Qi Jia Town  
Chang Ping District  
Beijing 102209, China  
Tel: +86 (0) 10 8178 5652  
Fax: +86 (0) 10 8178 5662  
[rd.service.cn@spx.com](mailto:rd.service.cn@spx.com)  
<http://cn.radiodetection.com>

#### **Radiodetection (Australia)**

Unit H11, 101 Rookwood Road,  
Yagoona NSW 2199, Australia  
Tel: +61 (0) 2 9707 3222  
Fax: +61 (0) 2 9707 3788  
[rd.sales.au@spx.com](mailto:rd.sales.au@spx.com)  
[www.radiodetection.com](http://www.radiodetection.com)

Radiodetection is a leading global developer and supplier of test equipment used by utility companies to help install, protect and maintain their infrastructure networks. Radiodetection is a unit of SPX (NYSE: SPW), a global Fortune 500 multi-industry manufacturing company. With headquarters in Charlotte, N.C., SPX has 15,000 employees in more than 35 countries worldwide. Visit [www.spx.com](http://www.spx.com).

© 2013 Radiodetection Ltd. – SPX Corporation. All rights reserved. Radiodetection is a subsidiary of SPX Corporation. SPX, the green ">" and "X" are trademarks of SPX Corporation, Inc. Radiodetection, RD5000, TruDepth, Centros and ClearTRACK are trademarks of Radiodetection Ltd. The Design of the RD5000 has been registered. The Design of the 4 chevrons has been registered and trademarked. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Radiodetection Ltd.